
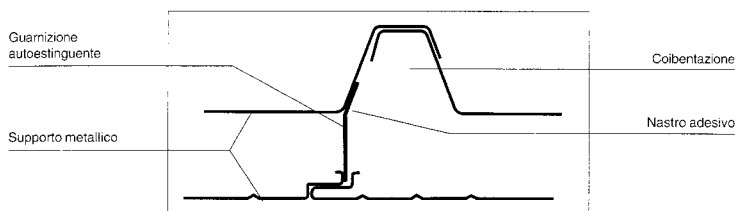


# PANNELLI COPERTURA

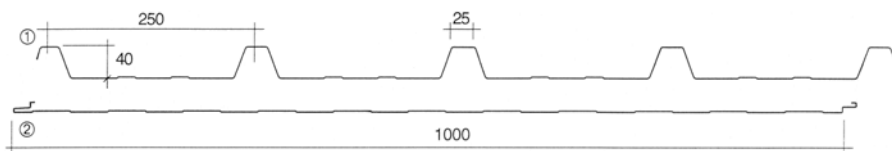

**SPESSORI mm 25/30/35/40/50/60/80/100/120/150**

**Freccia  $F \leq 1/200L$**

**Valori portate  $\geq \text{kg/m}^2$  300**

Sp. Pann. mm	Sp. Sup. mm	Peso kg/m <sup>2</sup>	K kcal/mqh °C	Carico massimo uniformemente distribuito in kg/m <sup>2</sup> Acciaio														
				Distanza fra gli appoggi in metri														
				2	2,5	3	3,5	4	4,5	5	2	2,5	3	3,5	4	4,5	5	
25	0,5	10,04	0593	220	140	85	60					290	220	130	95	65		
	0,6	11,85		235	150	91	64						235	139	102	70		
30	0,5	10,23	0,515	250	170	110	75						235	170	115	80	55	
	0,6	12,04		268	182	118	80						251	182	123	86	59	
35	0,5	10,42	0,455	280	200	130	90	65					265	215	140	95	70	
	0,6	12,23		298	214	139	96	70					284	230	150	102	75	
40	0,5	10,61	0,407	295	220	160	110	74	50				295	215	165	115	86	62
	0,6	12,42			235	171	118	79	54					230	177	123	92	66
50	0,5	10,99	0,337		265	200	140	95	70					270	200	150	105	82
	0,6	12,80			284	214	150	102	75	50				298	214	161	112	88
60	0,5	11,37	0,287		290	235	185	130	96	73					248	198	155	108
	0,6	13,18				251	198	139	103	78					265	212	166	116